

Video Matrix


Maximize and double your video enjoyment with 2 or 4 displays

Multiple Displays

Ideal for Presentations & Conferences



Diagram

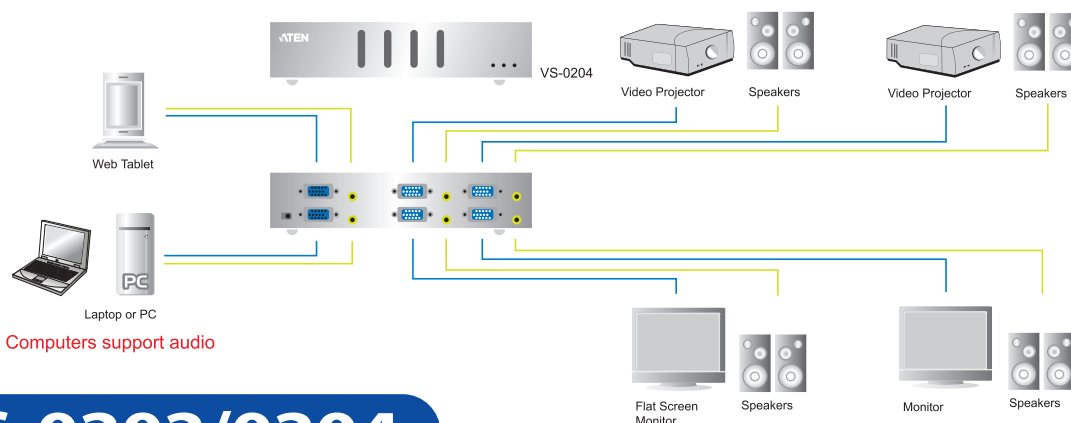

Model: **VS-0202/0204**

Features

- Each of the 2/4 video outs can toggle between Source1 and Source2 using front panel push buttons
- Duplicate and enhance video signals to up to 65 meters (max.)
- Expandable
- Audio enabled

Specifications

Function	VS-0202	VS-0204
Manufacturer	Expand	Expand
Power Supply	DC 5.3V	DC 5.3V
PC - Monitor Connection	2 - 2	2 - 4
Connectors	Out	2 x HDB-15 (Female), 2x Audio Jack (Female)
	In	2 x HDB-15 (Male), 2x Audio Jack (Female)
	Power	DC Jack
LED	Power	1 x Blue @ front
	Activity1	1 x Green @ front
	Activity2	1 x Orange @ front
	P Video1 2/4	2 x Green @ front
	P Video2 2/4	2 x Orange @ front
Buttons	2 x limpud @ front	4 x limpud @ front
VGA Resolution	1920 x 1440@ 1.8m(1st port DDC2B support)	1920 x 1440@ 1.8m(1st port or 3th port DDC2B support)
Slide switch	1 x 3 way slide switch@ back	N/A
Signal Type	XGA; VGA; SVGA	XGA; VGA; SVGA
Sync Range	Sync Positive/Negative	Sync Positive/Negative
Cable Distance	65M Max (Devices to monitor)	65M Max (Devices to monitor)
Power Consumption	8w	9w
Operating Temp.	0°C ~ 50°C	0°C ~ 50°C
Storage Temp.	-20°C ~ 60°C	-20°C ~ 60°C
Humidity	0 ~ 80% RH, NC	0 ~ 80% RH, NC
Enclosure	Metal	Metal
Weight	470g	690g
Dimensions (LxWxH)	130 x 77.2 x 45.8mm	200 x 77.2 x 45.8mm